

ND1070

High Frequency Neodymium Driver



Key Features

- 109 dB SPL 1W / 1m average sensitivity
- 1 inch exit
- 44 mm (1 3/4 inch) voice coil diameter
- 100 Watt continuous program
- Excellent thermal exchange
- Pure Titanium dome
- Patent pending phase plug
- Neodymium magnetic structure

GENERAL SPECIFICATIONS


| | | |
|---------------------------|-------------------------|------------|
| THROAT DIAMETER | 25,4 mm | (1 in) |
| RATED IMPEDANCE | 8 Ohm | |
| DC RESISTANCE | 5,3 Ohm | |
| MINIMUM IMPEDANCE | 7 Ohm at 4000Hz | |
| POWER HANDLING | | |
| CONTINUOUS PINK NOISE (1) | 50W above 1,6 kHz | |
| CONTINUOUS PROGRAM (2) | 100W above 1,6 kHz | |
| SENSITIVITY (1W@1m) (3) | 109 dB | |
| FREQUENCY RANGE | 1600Hz ÷ 20kHz | |
| RECOMM. XOVER FREQUENCY | 1600Hz (12dB/oct slope) | |
| DIAPHRAGM MATERIAL | Pure Titanium dome | |
| VOICE COIL DIAMETER | 44,4mm | (1 3/4 in) |
| MAGNET MATERIAL | Neodymium | |
| FLUX DENSITY | 1,8 T | |
| OVERALL DIAMETER | 92 mm | (3,6 in) |
| TOTAL DEPTH | 53 mm | (2,1 in) |
| NET WEIGHT | 1,1 kg | (2,6 lb) |

(1) Continuous pink noise power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.

(2) Program Power is defined as 3 dB greater than continuous pink noise but with 50% duty cycle.

(3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 averaged between 1kHz and 4 kHz.

ND1070 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XT1086 HORN MOUTH AXIS

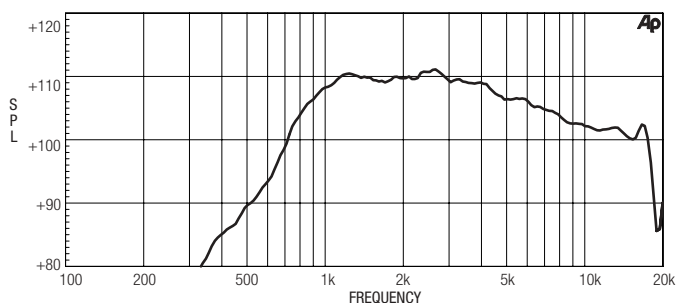

FREE AIR IMPEDANCE MAGNITUDE CURVE

